



Production printer for photo lab
ApeosPro C810/C750/C650 for Photo

 **ApeosPro™**



Meet the new ApeosPro for Photo.

ApeosPro for Photo delivers vivid color, high-resolution output, support for a wide range of paper types and combines these with diverse post-processing features to provide large-format photo albums, standard prints and other value-added photo products.

The high quality of ApeosPro for Photo meets the strict demands of photo labs to support the future of photo print businesses.

Print Speed

Colour / Monochrome

81 / 75 / 65 ppm (Max)

Printing system addressability

2400 × 2400 dpi

Paper Weight

52 to 350 gsm

Paper Size

100 × 148 to 330 × 1300 mm



“ApeosPro for Photo” is the special printer tuned for photo applications.

ApeosPro C810/C750/C650 for Photo

PRINT QUALITY

ApeosPro for Photo Firmware Fine-tuned for Photography



ApeosPro for Photo has achieved the optimum print quality for photo applications through special image processing that smoothly reproduces skin tone. The high image quality of ApeosPro for Photo

"World's first" high resolution LED printhead print output

Latest technology to achieve professional quality images and high-definition printing.

- World's first* LED printhead with 2400 dpi resolution
- Vibrant colors and smooth gradation thanks to the minute toner particles of the Super EA Eco toner
- Crisp reproduction of images with fine lines and tiny text

* Dry-type electrophotographic method. According to our research as of March 2021

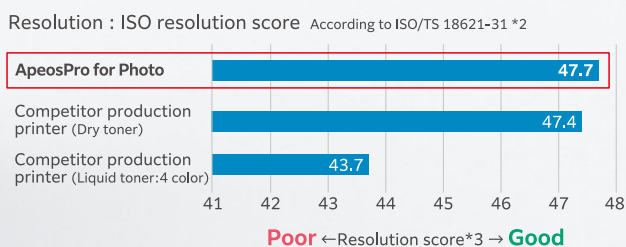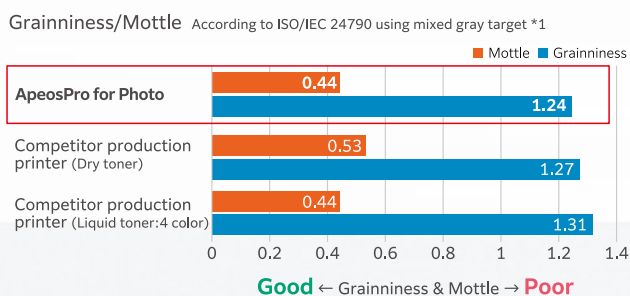

1 Gray patch of CIELAB L=60 was measured.

*2 Procedure for "Process colour evaluation" was applied.
Test pattern "ISO_ConRes20_sRGB" defined in ISO/TS 18621-31 was printed and measured.

*3 Score 100 is ideal reproduction.

Maintain print quality with easy adjustment

Use inbuilt standard SIQA* to easily & quickly adjust the print quality.

- Simply scan the dedicated charts to automatically calculate the appropriate adjustment values for both Side 1 & 2 Registration, Density Uniformity Adjustment, and Adjust Image Transfer

* Simple Image Quality Adjustment

VERSATILITY

The ApeosPro for Photo's exceptional paper-handling capacity means this system can cater to a diverse range of applications.

- Supporting various paper stock to cover the wide range of applications including photo albums, photo prints.
- It supports a wide range of paper sizes, from minimum size of 100.0 mm × 148.0 mm to long paper 330.2 mm × 1300.0 mm.
- By adjusting the force applied to the paper according to the paper thickness, stable paper feed is performed even with cardstock paper, and high registration accuracy is achieved.
- The optimum output conditions for each type of paper, Such as transfer conditions, can be registered (maximum: 100) so that high-quality output can be achieved efficiently simply by selecting the paper type.
- Free from volatile solvent for excellent safety and environmental performance.
- By realizing speedy calibration with the scanner built into the printer, it contributes not only to maintaining print quality but also to improving the operating rate of the printer. These functions greatly reduces the load on the photo lab users.

GP Controller

<High productivity>

- Heavy duty RIP function with high-speed processing for high-quality or variable data print jobs
- Equipped as a standard with the RIP accelerator board that produces high speed performance beyond the physical specifications of the server
- High speed serial transmission technology enables high speed job transfer to multifunction devices


<Multifunction>

- Easy operation with drag & drop of jobs during preview tasks like imposition or merging



GP Controller D01

- A monitor, keyboard and mouse are required.
- Images are for illustration purposes only. Actual product may change.

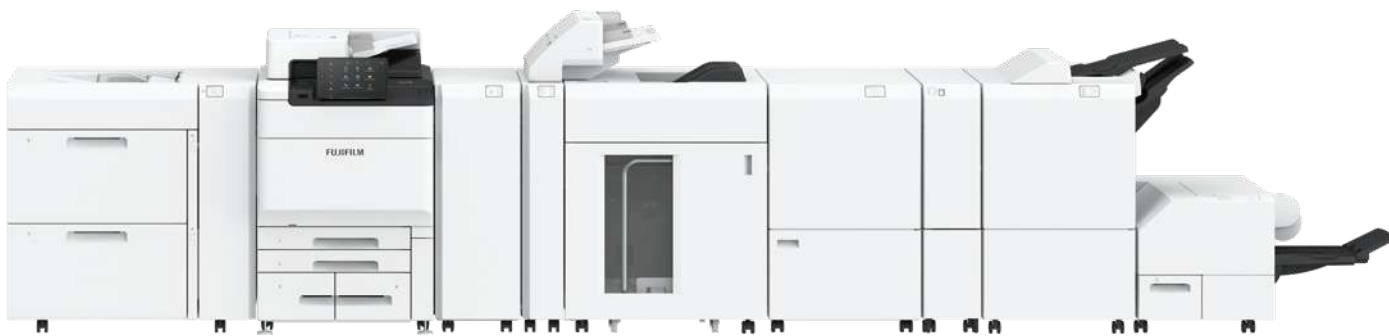

Can creates the variety of high-quality value-added photo products in photo labs

Beautiful post-processing output with in-line finishing options

From printing to post-processing, you can do it all at once.

- Beautifully designed full page photo booklets with full bleed trim
- High-quality booklet with a square back finish for a flat book spine
- Crease* function to create unique accordion fold for promotional materials
- Insert oversized A3 size paper as covers
- Supports frequently used office functions–Punch, Side Stitch, Saddle Staple, and Single Fold

Note: Optional. See page 9 for details on the output options and postprocessing.






* Up to five creases can be made for mountain fold and valley fold. Folding is performed manually.

Print beautifully on various types of paper

Supports the various characteristics of paper, enabling high-precision output.

- The sensor detects misalignment of paper traveling at high speed and automatically corrects it
- By adjusting the force applied to the paper according to the paper thickness, stable paper feed is performed even with cardstock paper, and high registration accuracy is achieved
- Built-in decurler flattens paper curl and stabilises paper feed
- While viewing the amount of curl on paper, curl adjustments can be performed in real time*
- The optimum output conditions for each type of paper, such as transfer conditions, can be registered (maximum: 100) so that high-quality output can be achieved efficiently simply by selecting the paper type

* Optional.

Configurations	Details		
Compact basic configuration	 <ul style="list-style-type: none"> • W 780 × D 793 × H 1,154 mm • Printer Body • Simple catch tray • Catch Tray Fan Kit 	Start dry print production with low investment	
Basic configuration + finisher	 <ul style="list-style-type: none"> • Printer Body + bypass tray • Finisher C4 	Improve work efficiency with continuous printing using the finisher's paper sort function	
Printer Body + paper feed option + Finisher	 <ul style="list-style-type: none"> • Printer Body • Interface module D1 • High capacity feeder B1-S or C3-DS • Finisher C4 	 <p>Maximum configuration</p>	For photo labs that want to automatically produce Soft cover Photobook, PhotoZine type booklet, Borderless Folded card, etc.
Configuration for photo labs that mainly produce simple photo books	 <p>4,765 mm</p>	Interposer D1 can be excluded if no special cover is used	

Optional

Feeding Options

Bypass Tray (Standard)*1
52 to 350 gsm
250 sheets


1300 mm Long paper*2

Multi Sheet Inserter for Banner Print*1
52 to 350 gsm
250 sheets

1300 mm Long Paper*2

660 mm Long Paper*3

High Capacity Feeder C3-DS




52 to 350 gsm
2000 sheets × 2-tray

Air Assist

Multi-feed Detection

High Capacity Feeder B1-S



52 to 300 gsm
2000 sheets × 1-tray

Cabinet


Air Assist

Multi-feed Detection

Note: Supported paper weight for long paper is 52 to 220 gsm.
*1: Installed directly to the printer, or installed on the top of High Capacity Feeder C3-DS or B1-S. Paper weight up to 300 gsm is supported when installed on the top of High Capacity Feeder C3-DS or B1-S.
*2: When installed directly on the printer unit.
*3: When installed on the top of High Capacity Feeder C3-DS or B1-S.

Output Options

High Capacity Stacker and Finisher D6 for professional use (maximum configuration)



1 Interface Decurler Module D1
Real Time Curl Correction
(3 Levels Upward / Off / 3 Levels Downward)

2 Inserter D1
Cover / Sheet Insertion

3 High Capacity Stacker A1
5000-sheet Stacking
Stacker Cart
Long Paper Stacking*1


4 Crease / Two-sided Trimmer D2
Two-Sided Trim Crease

5 Folder Unit CD2
Z Fold Half Sheet / Tri-Fold

6 Finisher D6 / Finisher D6 with Booklet Maker
Sort / Stack
Staple (100 sheets)
Punch*1
Saddle Staple (30 sheets) / Single Fold*2
Long Paper Stacking*1

7 Square Back Trimmer D1
Face Trim Square Back


Finisher-C4 fits into the office space



9 Folder Unit CD3
Z Fold Half Sheet / Tri-Fold

10 Finisher-C4
Sort / Stack
Staple (50 sheets / 65 sheets*1)
Staple-free Staple (10 sheets)
Punch*1
Saddle Staple (20 sheets) / Single Fold

Space-saving Finisher D6 with a slim type connection module




8 Interface Module D1
Real Time Curl Correction (Upward/Off/Downward)
Slim Connection Module

Note: When using **8**, the output options that can be connected are **5** and **6** only. Other output options that can be connected with Finisher D6 / Finisher D6 with Booklet Maker cannot be connected.

Note: Simple Catch Tray / Offset Catch Tray / Long Catch Tray are available if post-processing is not required.

*1: Optional.
*2: For Finisher D6 with Booklet Maker.

Finishing Applications



Cover / Sheet Insertion

Punch

Side Stitch

Saddle Staple

Single Fold

Z Fold Half Sheet

Tri-Fold

Crease

Face Trim

Two-Sided Trim

Full Bleed Trim

Square Back

5

ApeosPro C810 / C750 / C650 for Photo Specifications

Basic Specifications / Print Function

Item	Description	C810	C750	C650
Type	Console			
Colour Capability	Full colour			
Printing Resolution	2400 × 2400 dpi			
Continuous Print Speed*1	A4: 81 ppm, A3: 42 ppm	A4: 75 ppm, A3: 37 ppm	A4: 65 ppm, A3: 34 ppm	
Paper Size*2	Tray 1, 2	Standard size: Max A3, 11 × 17"; Min A5 Custom size: Max 330 × 488 mm, Min 100 × 148 mm		
	Tray 3, 4	Standard size: Max A4, Letter, Min JIS B5		
	Bypass Tray (Tray 5) *3	Standard size: Max A3, 11 × 17"; Min A6 Custom size: Max 330 × 1300 mm*4, Min 100 × 148 mm		
Paper Weight*5	Tray 1 to 4	52 to 300 gsm		
	Bypass Tray (Tray 5) *3	52 to 350 gsm*6		
	Standard	520 sheets × 2-tray + 840 sheets + 1230 sheets + Bypass Tray 250 sheets		
Paper Tray Capacity*7 Optional	Multi Sheet Inserter for Banner Print: 250 sheets			
	High Capacity Feeder B1-S: 2000 sheets × 1-tray			
	Output Tray Capacity*7 *8	500 sheets		
Power Supply	AC220-240 V +/- 10 %, 10 A, 50/60 Hz common			
IMaximum Power	2.4 kW			
Consumption	Sleep Mode: 0.5 W, Low Power Mode: 150 W, Ready Mode: 193 W			
Dimensions*9	W 780 × D 793 × H 1154 mm			
Weight*9	246 kg			

*1: When continuously printing a single document on 52 to 128 gsm, uncoated paper, Print speed may be reduced depending on conditions such as output data, use of auto image quality adjustment, is performed, use of mixed paper sizes / types, switching the feeding tray and use of long paper output.
*2: Image loss width: Lead edge 4.0 mm, Trail edge 4.0 mm, Front 3.0 mm, Rear 3.0 mm.
*3: The optional Multi Sheet Inserter for Banner Print is available for smooth and stable feeding of long paper.
*4: When a standard Bypass Tray or optional Multi Sheet Inserter for Banner Print is connected directly to main unit (including when High Capacity Feeder B1 is connected), Automatic duplex printing support up to 330 × 762 mm.
*5: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement.
*6: For Banner Printing, uncoated paper: 52 to 220 gsm, coated paper: 106 to 220 gsm.
*7: 80 gsm paper, *8: When the Catch Tray is installed, *9:When Bypass Tray closed, The output option is not connected,

Print Server [GP Controller D01]

Item	Description
Type	External
CPU	Intel® Core™ i3-8100 Processor (3.60 GHz)
Storage device	Hard disk: 1 TB (System) + 1 TB (Option), DVD Multi drive
Memory capacity	16 GB (Max: 32 GB)
Server Operation System	Windows 10 IoT Enterprise LTSC 2019 (64bit)
Page Description Language	Adobe® PostScript® 3™, PDF/Vt-1, PDF/Vt-2, PPML, VIPP*1
Print Data Format	PS, PDF2.0, PDF/X-1a, PDF/X-3, PDF/X-4, PDF/X-5, EPS, TIFF, JPEG
Supported Operating System *2	Windows 10 (32 bit / 64 bit), Windows 8.1 (32 bit / 64 bit), Windows Server 2019 (64 bit), Windows Server 2016 (64 bit), Windows Server 2012 R2 (64 bit), Windows Server 2012 (64 bit), macOS 11 / 10.15 / 10.14 / 10.13 / 10.12
Interface	Ethernet: 1000BASE-T / 100BASE-TX / 10BASE-T × 2 USB: USB3.1 × 4 (front side Gen1 × 2, back side Gen2 × 2), USB2.0 × 4 (back side)
Network Protocol	TCP/IP (Ipd / FTP / IPP*3 / SMB / JDF / HTTP), Bonjour
Power Supply	AC100-240 V +/- 10 %, 5.0-2.5 A, 50/60 Hz common
Maximum Power Consumption	0.26 kW
Dimensions*9	W 98 × D 400 × H 340 mm
Weight*9	7 kg

*1: VIPP stands for Variable Information Production Printware. Used with optional software FreeFlow VI Compose.
*2: Please refer to our official website for the latest supported OS.
*3: Used to work with FreeFlow Digital Workflow Collection.

High Capacity Feeder B1-S (Optional)

Item	Description
Paper Size	Standard size: Max A3, 11 × 17", Min A6*1 Custom size: Max 330 × 488 mm*2, Min 100 × 148 mm
Paper Weight	52 to 300 gsm
Feeding Capacity / Number of Tray*3	2000 sheets × 1-tray
Power Supply	AC100-120 V +/- 10 %, 2.5 A, AC220-240 V +/- 10 %, 1.5 A, 50/60 Hz common
Maximum Power Consumption	360 W
Dimensions / Weight	W 988 × D 762 × H 992 mm, 160 kg*4

Note: When this option is installed, attach standard Bypass Tray or optional Multi Sheet Inserter for Banner Print to the top of the HighCapacity Feeder.
*1: When setting main scanning 100 to 182 mm paper, Post Card Kit is required,
*2: If you are using paper length 488 mm to 660 mm, optional Multi Sheet Inserter for Banner Print is required. It is recommended to install optional Position Adjuster.
*3: 80 gsm paper, *4: Excluding Bypass Tray.

High Capacity Feeder C3-DS (Optional)

Item	Description
Paper Size	Standard size: Max A3, 11 × 17", Min A6*1 Custom size: Max 330 × 488 mm*2, Min 100 × 148 mm
Paper Weight	52 to 300 gsm
Feeding Capacity / Number of Tray*3	2000 sheets × 1-tray
Power Supply	AC100-120 V +/- 10 %, 6 A, AC220-240 V +/- 10 %, 4 A, 50/60 Hz common
Maximum Power Consumption	360 W
Dimensions / Weight	W 988 × D 762 × H 992 mm, 160 kg*4

Note: When this option is installed, attach standard Bypass Tray or optional Multi Sheet Inserter for Banner Print to the top of the High Capacity Feeder.
*1: When setting main scanning 100 to 182 mm paper, Post Card Kit is required,
*2: If you are using paper length 488 mm to 660 mm, optional Multi Sheet Inserter for Banner Print is required. It is recommended to install optional Position Adjuster.
*3: 80 gsm paper, *4: Excluding Bypass Tray.

Catch Tray (Optional)

Item	Description
Paper Size	Offset Catch Tray
	Standard size: Max A3, 11 × 17"; Min A6
	Custom size: Max 330 × 660 mm*1, Min 100 × 148 mm
Paper Weight	Long Catch Tray
	Standard size: Max A3, 11 × 17"; Min A6
	Custom size: Max 330 × 1300 mm, Min 100 × 148 mm
Paper Weight	52 to 350 gsm
Paper Capacity*2	500 sheets
Dimensions / Weight	W 423 × D 399 × H 331 mm, 6 kg

*1: Paper Capacity is guaranteed up to 488 mm.
*2: 80 gsm paper.

Folder Unit (Optional)

Item	Description: Folder Unit CD2
Z Fold Half	Paper Size A3, 11 × 17", JIS B4
Sheet	Paper Weight 60 to 90 gsm
Tri-fold	Paper Size A4, Letter
	Paper Weight 60 to 90 gsm
	Paper Capacity*1 30 sheets
Power Supply / Maximum Power Consumption"	AC100-127 V +/- 10 %, 1 A, AC200-240 V +/- 10 %, 0.6 A, 50/60 Hz common*2, 120 W
Dimensions / Weight	W 235 × D 725 × H 992 mm, 55 kg

Note: Folder Unit CD3 is option for Finisher-C4 and Finisher-C4 with Booklet Maker. Folder Unit CD2 is option for Finisher D6 and Finisher D6 with Booklet Maker.
*1: 82 gsm paper.
*2: Power supply separate from the Main Unit is required.

Finisher-C4 (Optional)

Item	Item
Type	Output Tray
Paper Size	Finishing Tray
	Sort (Offset available) / Stack (Offset available)
	Sort (Offset available) / Stack (Offset available)
Paper Weight	Output Tray
	Standard size: Max A3, 11 × 17", Min A6
	Custom size: Max 330 × 1300 mm, Min 100 × 148 mm
Paper Capacity*2	Finishing Tray
	Standard size: Max A3, 11 × 17", Min A5
	Custom size: Max 330 × 488 mm, Min 203 × 182 mm
Paper Capacity*2	Output Tray
	52 to 350 gsm*1
	Finishing Tray
Paper Capacity*2	Output Tray
	52 to 350 gsm*1
	500 sheets (A4)
Paper Capacity*2	Output Tray
	[Without Stapling]
	A4: 3000 sheets, JIS B4 or larger: 1500sheets, A5: 1000 sheets,
Paper Capacity*2	Finishing Tray
	Mixed Size Stacking*3 : 300 sheets
	[With Stapling]
Paper Capacity*2	Finishing Tray
	A4: 200 sets or 3000 sheets, JIS B4 or larger: 100 sets or 1500 sheets, A5: 100 sets or 1000 sheets,
	Mixed Size Stacking*3: 70 sets or 200 sheets
Paper Capacity*2	Finishing Tray
	Capacity
	50 sheets (90 gsm or less)*4
Paper Capacity*2	Finishing Tray
	Paper Size*5
	Standard size: Max A3, 11 × 17"; Min A5
Paper Capacity*2	Finishing Tray
	Paper Weight
	52 to 350 gsm
Paper Capacity*2	Finishing Tray
	Position
	Single stapling, Dual stapling
Paper Capacity*2	Finishing Tray
	Number of Holes
	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
Paper Capacity*2	Finishing Tray
	Paper Size*6
	Standard size: Max A3, 11 × 17"; Min A5
Paper Capacity*2	Finishing Tray
	Paper Weight
	52 to 220 gsm
Dimensions*7 / Weight	W 771 × D 692 × H 1054 mm, 45 kg

Note: Transport Unit VI is required.
*1: 52 to 55 gsm output paper may not be aligned properly depending on the paper type.
*2: 80 gsm paper,
*3: When larger size sheets are stacked on top of smaller size sheets,
*4: Up to 65 sheets can be stapled when the Finisher-C Staple Unit 65 Sheets is installed. However, depending on the paper type, incorrect stapling such as uneven edge alignment of sets may occur.
*5: Available staple positions vary depending on the paper size.
*6: Available number of punch holes varies depending on the paper size.
*7: Inner connector within the body is excluded.

Square Back Fold Trimmer D1 (Optional)

Item	Description
Paper Size	Same as the paper size of the Finisher D6 Booklet Finis
Paper Weight	Same as the paper weight of the Finisher D6 Booklet Finishing
Booklet Tray Capacity*1	20 sets (15 sheets bind and below), 15 sets (16 sheets bind and above)
Face Trim	Capacity*2
Face Trim	Saddle Staple: 30 sheets, Single Fold: 5 sheets
Face Trim	Trim dimensions 2 to 20 mm
Square Back Capacity*2*3	30 sheets
Power Supply	AC100-240 V +/- 10 %, 0.8 A (100 V) / 0.4 A (240 V), 50/60 Hz common
Maximum Power Consumption	96 W
Dimensions / Weight	W 1066 × D 725 × H 552 mm, 100 kg

Note: Exclusive optional for Finisher D6 with Booklet Maker (when Interface Decurler Module D1 is installed).
*1: Paper may not be accepted depending on paper type and other usage conditions.
*2: The capacity can decrease depending on type and weight of paper being used and other conditions.
*3: Square back finishing is not supported for single-folding and saddle stapling of less than 5 sheets.

Crease / Two-sided Trimmer D2 (Optional)

Item	Description
Two-sided	Paper Size
Two-sided	Standard size: Max A3, 11 × 17"; Min A4, Letter
Two-sided	Custom size: Max 330 × 488 mm; Min 194 × 210 mm
Trim	Paper Weight
Trim	52 to 350 gsm
Trim	Trim dimensions
Trim	One side: 6 to 25 mm
O(#3&#	Paper Size
	Standard size: Max A3, 11 × 17"; Min JIS B5
	Custom size: Max 330 × 488 mm; Min 182 × 210 mm
O(#3&#	Paper Weight*1
	52 to 350 gsm
	Number of Lines*2 1 to 5
Power Supply / Maximum Power Consumption	AC100-240 V +/- 10 %, 4 A (100 V) / 2 A (240 V), 50/60 Hz common, 480 W
Dimensions / Weight	W 605 × D 725 × H 992 mm, 128 kg

Note: Exclusive optional for Finisher D6 with Booklet Maker (when Interface Decurler Module D1 is installed).
*1: Up to 300 gsm is supported for booklet finishing. 157 gsm or more is supported for single sheet.
*2: The continuous print speed will decrease significantly as the number of lines increases.

Finisher D6 / Finisher D6 with Booklet Maker (Optional)

Item	Description	
	Finisher D6	Finisher D6 with Booklet Maker
Type	Output Tray	Sort / Stack
	Finishing Tray	Sort (Offset available) / Stack (Offset available)
	Booklet Tray	— Sort / Stack
Paper Size	Output Tray	Standard size: Max A3, 11 × 17", Min A6 Custom size: Max 330 × 1300 mm*1; Min 100 × 148 mm
	Finishing Tray	Standard size: Max A3, 11 × 17", Min A5 Custom size: Max 330 × 488 mm; Min 148 × 148 mm
Paper Weight	Output Tray	52 to 350 gsm
	Finishing Tray	52 to 350 gsm
	Output Tray	500 sheets (A4)
Paper Capacity*2		[Without Stapling]
		A4: 3000 sheets
		JIS B4 or larger: 1500sheets
		Mixed Size Stacking*3: 350 sheets
		[With Stapling]
Finishing Tray		A4: 200 sets or 3000 sheets
		JIS B4 or larger: 100 sets or 1500 sheets
		[Without Stapling]
		A4: 2000 sheets
		JIS B4 or larger: 1500sheets
		Mixed Size Stacking*3: 350 sheets
		[With Stapling]
		A4: 200 sets or 2000 sheets
		JIS B4 or larger: 100 sets or 1500 sheets
	Booklet Tray	— Single Fold: 5 sheets (220 gsm or less)
Staple	Capacity	100 sheets (90 gsm or less)*5
	Paper Size*6	Standard size: Max A3, 11 × 17", Min A5
	Paper Weight	52 to 350 gsm
	Position	Single stapling, Dual stapling, 4 stapling
Punch*7	Number of Holes	2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications)
	Paper Size*8	Standard size: Max A3, 11 × 17"; Min JIS B5
	Paper Weight	52 to 220 gsm
	Number of Holes	— Saddle Staple: 30 sheets (90 gsm or less) Single Fold: 5 sheets (220 gsm or less)
Booklet Finishing	Paper Size	Standard size: Max A3, 11 × 17"; Min JIS B5
	Paper Weight	60 to 350 gsm
Power Supply	AC100-127 V +/- 10 %, 3 A, AC200-240 V +/- 10 %, 1.8 A, 50/60 Hz common	
Maximum Power Consumption	360 W	
Dimensions / Weight	W 855 × D 725 × H 1200 mm, 85 kg	W 892 × D 725 × H 1200 mm, 105 kg
	When Folder Unit CD2 is installed : W 1092 × D 725 × H 1200 mm, 142 kg	When Folder Unit CD2 is installed : W 1129 × D 725 × H 1200 mm, 162 kg

Note: Interface Module D1 or Interface Decurler Module D1 is required to connect to the Main Unit.

*1: For paper longer than 330 × 488 mm, the capacity is not guaranteed. When the optional Banner Print Extension Kit is installed, 150 sheets of long paper up to 330 × 660 mm; 100 sheets of long paper up to 330 × 729 mm; 10 sheets of long paper up to 330 × 1300 mm can be stacked.

*2: 82 gsm paper.

*3: When larger size sheets are stacked on top of smaller size sheets.

*4: When 16 sheets / set.

*5: 65 sheets for sizes exceeding A4.

*6: Available staple positions vary depending on the paper size.

*7: Optional. *8: Available number of punch holes varies depending on the paper size.

*9: The maximum number of sheets varies depending on the paper weight, Booklet may not be tightly closed depending on the size or type of the paper.

High Capacity Stacker A1 (Optional)

Item	Description: Folder Unit CD2	
Paper	Output Tray*2	500 sheets*3
Capacity*1	High Capacity Stacker – Stacker Cart	5000 sheets
Paper Size	Output Tray	"Standard size: Max A3, 11 × 17"; Min A6 Custom size: Max 330 × 1300 mm; Min 100 × 148 mm"
	High Capacity Stacker – Stacker Cart	"Standard Size: Max A3, 11 × 17", Min JIS B5 Custom Size: Max 330 × 488 mm; Min 203 × 182 mm"
Paper Weight	Output Tray	52 to 350 gsm
	High Capacity Stacker – Stacker Cart	52 to 300 gsm
Power Supply / Maximum Power Consumption	AC100-240 V +/- 10 %, 1.5 A (100 V) / 0.8 A (240 V), 50/60 Hz common, 192 W	
Dimensions / Weight*4	W 800 × D 725 × H 1042 mm, 155 kg	

Note: Interface Decurler Module D1 is required.

*1: 80 gsm paper.

*2: For paper longer than 330 × 488 mm, the capacity is not guaranteed. When the optional Banner Print Extension Kit is installed, 100 sheets of long paper up to 330 × 729 mm; 10 sheets of long paper up to 330 × 1300 mm can be stacked.

*3: When the optional Banner Print Extension Kit is installed, 250 sheets. *4: Including Stacker Cart.

Interface Decurler Module D1 (Optional)

Item	Description
Power Supply / Maximum Power Consumption	AC100-240 V +/- 10 %, 2.5 A (100 V) / 1.0 A (240 V), 50/60 Hz common, 250 W
Dimensions / Weight	W 340 × D 725 × H 992 mm, 40 kg

Note: Interface Decurler Module D1 is necessary for connecting High Capacity Stacker A1 to the printer.

Note: Interface Module D1 or Interface Decurler Module D1 is necessary for connecting Finisher D6 or Finisher D6 with Booklet Maker to the printer.

Insertor D1 (Optional)

Item	Description
Paper Size	Standard size: Max A3, 11 × 17"; Min A5*1 Custom size: Max 330 × 488 mm; Min 182 × 148 mm
Paper Weight	52 to 350 gsm
Power Supply	Supplied from the Interface Decurler Module D1
Dimensions / Weight	W 700*3 × D 725 × H 1235 mm, 45 kg

Note: Exclusive optional for Finisher D6 or Finisher D6 with Booklet Maker (when Interface Decurler Module D1 is installed).

*1: Available when custom size is entered.


*2: 82 gsm paper.

*3: The width of the paper transfer area when connected to the device is 165 mm.

If the storage media of the base unit fail, loss of received data, accumulated data, registered setting data, etc. may occur. In no event shall the Company be liable for any damages whatsoever arising from loss of data.

Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

Body size and Footprint

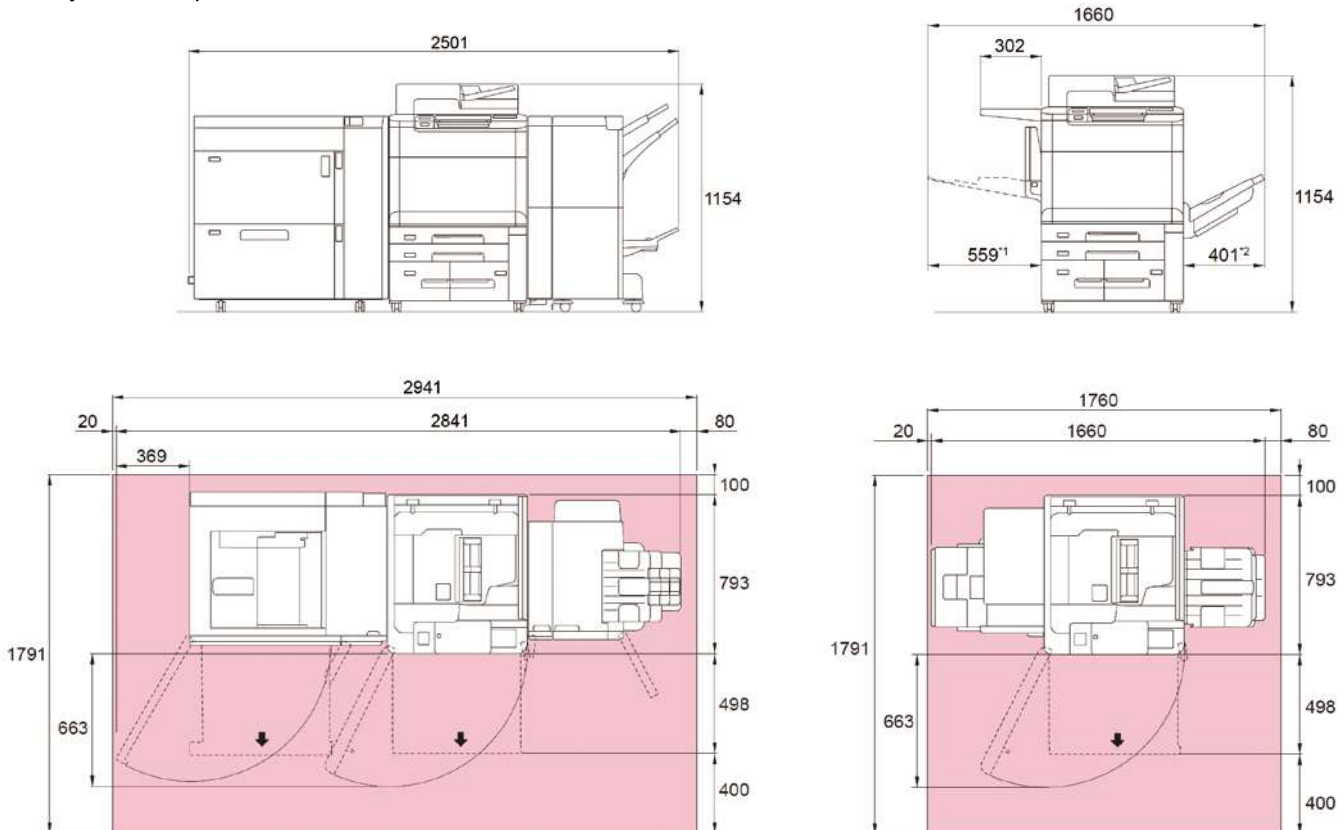

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. • Unused postage stamps, post cards, etc. • Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks • FUJIFILM and FUJIFILM Logo are registered trademarks or trademarks of FUJIFILM Corporation. • Apeos, ApeosPro, ApeosWiz, Working Folder is registered trademarks or trademarks of FUJIFILM Business Innovation Corp. • Adobe, Adobe logo, PostScript and PostScript logo are either registered trademarks or trademarks of Adobe in the United States and/or other countries. • Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. • PANTONE and other Pantone trademarks are trademarks or registered trademarks of Pantone LLC in the United States and/or other countries. • All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.



For Your Safety

Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

FUJIFILM

FUJIFILM Corporation

7-3, AKASAKA 9-CHOME, MINATO-KU, TOKYO 107-0052, JAPAN